

CLASS

alphatile & stone

COMMUSS)

erles



Available Colors





RENOIR



Available Options

2X2 MOSAIC - Matte 3X24 BULLNOSE - Matte



CLASSICA Series

Glazed Porcelain Matte Finish

ALASKA GLACIER 12 x 24 MS.CL.AGL.1224



All items shown in this document are part of Alpha's stocking program. For special orders, please contact your Alpha Tile Sales Representative.





ALASKA GLACIER

CLASSICA Series

Glazed Porcelain Matte Finish


RENOIR 12 x 24 MS.CL.RNR.1224



All items shown in this document are part of Alpha's stocking program. For special orders, please contact your Alpha Tile Sales Representative.



RENOIR

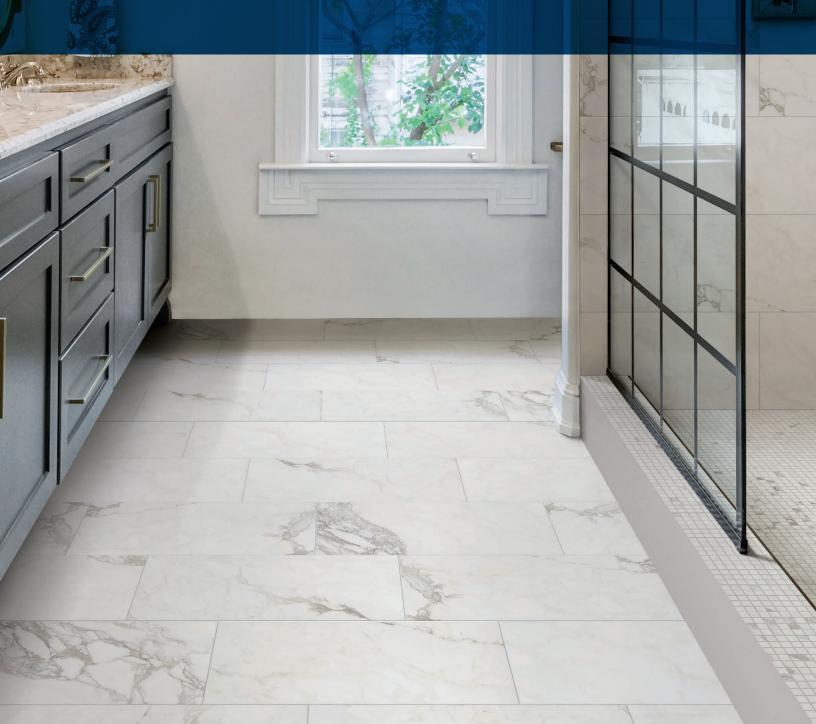

CLASSICA Series

Glazed Porcelain Matte Finish

CALACATTA GOLD 12 x 24 MS.CL.CAG.1224

All items shown in this document are part of Alpha's stocking program. For special orders, please contact your Alpha Tile Sales Representative.



CALACATTA GOLD





Member of Canada

For information concerning LEED, please contact our Sales Representative

Green Building

Council

Member of U.S. Green Building

Council

Marble Association of

Canada

The Terrazzo, Tile, and



Ceramic Tile Distributors of America (CTDA)

Marble Institute of America

Packing Details

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PAL
12" x 24"	8	16	55.963	48
2X2 MOSAIC	10	10	34.667	45
3X24 BULLNOSE	12	N/A	21.962	N/A

Examples of Recommended Applications



MORE	"MORE" Surface Care Product Guide				
Task	Product Recommendation	Dilution with Water	Frequency		
Grout Sealing	MORE™ Grout, Ceramic & Porcelain Sealer	Ready to use	Commercial: 1-3 Years Residential: 5-8 Years		
Daily Maintenance	MORE [™] Stone and Tile Cleaner	1 : 128 Ratio	Daily		
Deep Cleaning	MORE [™] Alkaline Cleaner	1 : 4 Ratio	As Needed		
Grout Haze- Cementitious	MORE™ Acidic Cleaner	1 : 4 Ratio	As Needed		
Grout Haze - Epoxy / Urethane	MORE [™] Coating Stripper*	Ready to use	As Needed		

* Always test in an inconspicuous area to make sure the product is achieving the desired results and is not damaging the finish of the surface.

technical specifications

		REFERENCE VALUE	DECLARED VALUE	TEST METHOD
	SURFACE ABRASION		IV	ASTM C1027
	WATER ABSORPTION	≤0.5%	MEETS REQUIREMENT	ASTM C373
•	CHEMICAL RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM 650
*	DYNAMIC COEFFICIENT OF FRICTION	≥0.42 WET	MEETS REQUIREMENT	ANSI A137.1
×	STAIN RESISTANCE	AS REPORTED	NOT AFFECTED	ASTM C1378
Å	BREAKING STRENGTH	AS REPORTED	≥400	ASTM C648
*	RESISTANCE TO FREEZE	AS REPORTED	RESISTANT	ASTM C1026



RESISTANT FOR THE HOUSE The product is water-resistant: it stops liquids, body oils, acidic and staining substances from penetrating the tiles. It resists scratches, scuffs and gauges belter than any other floor covering. It does not absorb furnes, odors or smoke. It doesnt discolor or fade when exposed to sunlight, or other natural elements. It is completely fire proof. It resists burns and doesn's feed a fire. Its high resistance to abrasive dirt and grime makes it suitable even for heavy-traffic areas of the house such as hallways, entrances, foyers and walkways.

FROST RESISTANT Exceeding the ADA standard requirements, the Milestone product can also be used for outside applications. It stands up to abrupt temperature changes and freezing-thaw cycles. When properly installed according to ANSI A137.1. It's strong enough to be used in exterior applications even in frigid climates. Proper consideration must be given to the anti-slip requirements of the area to be tiled.

ANTI-SLIP The testing conducted on our finished product will guarantee that all of our tiles will have an anti-slip surface so they may be used with total confidence in kitchen and bath applications. The Milestone product is perfect for both home and commercial interiors, such as restaurants, offices, rotail stores, etc. Its anti slip proporties provide a safe walkking surface in both wet and dry conditions, according to the Americans with Disabilities Act.

HYGIENE/SANATATION & EASY CLEANING The Milestone product doesn't absorb odors or bacteria of any kind. It's easy to clean with a dampsponge, mop, or cloth. For a more intense cleaning, simply use a mild solution of water and a common household detergent. Regular cleaning will stop the growth ot germs and bacteria in damp areas such as the bathroom.

• DUE TO THE INHERENT NATURE OF FIRED PORCELAIN TILE, IT IS IMPORTANT TO NOTE THAT THE COEFFICENT OF FRICTION MAY VARY WITHIN AND BETWEEN PRODUCT RUNS.

Technical data is supplied by the manufacturer and is subject to change at any time. Olympia or Alpha Tile does not provide warranties as to the specifications of any product.

alphatile & stone

Tampa

2443 East Meadow Blvd. Tampa, FL 33619 (813) 620-9000 (800) 785-9000

Fort Myers

10898-A Metro Parkway Ft. Myers, FL 33966 (239) 275-8288 (800) 785-8288

Sarasota

1808 Whitfield Ave. Sarasota, FL 34243 (941) 727-7433 (800) 785-3484



www.alphatile.com