

LARIX SERIES

PORCELAIN



LARIX - COLOR BODY PORCELAIN
RECTIFIED

FRESH
(LIGHT GOLD)



10x60
CR 10X60 LAFR
6x30
RF.LX.FRS.0630

NATURAL
(BEIGE)



10x60
CR 10X60 LANA
6x30
RF.LX.NAT.0630

SUN
(DARK BEIGE)



10x60
CR 10X60 LASU
6x30
RF.LX.SUN.0630

SHADE
(GREY)



10x60
CR 10X60 LASH
6x30
RF.LX.SHA.0630

Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile.
For special orders please contact your Alpha Tile Sales Representative

LARIX - COLOR BODY PORCELAIN
RECTIFIED

DECOR

NATURAL DECOR
(BEIGE)



6x30

RF.LX.NAT.0630.DECO

SUN DECOR
(DARK BEIGE)



6x30

RF.LX.SUN.0630.DECO

SHADE DECOR
(GREY)



6x30

RF.LX.SHA.0630.DECO

Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile.
For special orders please contact your Alpha Tile Sales Representative

LARIX - COLOR BODY PORCELAIN
RECTIFIED

MURETTO LISTELLO

FRESH
(LIGHT GOLD)



10x30
RF.LX.FRS.1030.MLS

NATURAL
(BEIGE)



10x30
RF.LX.NAT.1030.MLS

SUN
(DARK BEIGE)



10x30
RF.LX.SUN.1030.MLS

SHADE
(GREY)



10x30
RF.LX.SHA.1030.MLS

Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile.
For special orders please contact your Alpha Tile Sales Representative

LARIX - COLOR BODY PORCELAIN
RECTIFIED

Packing Information


TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PALLET
10x60	3	12.12	56	30
6x30	7	8.48	39	48
6x30 DECOR	7	8.48	39	48
10x30 MOSAIC	4		35.60	24

Test Performed -- Results Conform

TEST PERFORMED	TEST METHOD	STANDARD	RESULTS
Water Absorption	ISO 10545-3	≤0.5% (porcelain) ≤3.0% (monocottura)	0,02
DCOF	ANSI A137.1/2012	≥0.42	0.56
Slip Resistance	DIN 51130/51097	R9	R10
	BCR	≤.40 to ≤.74	
Bending / Breaking Strength	ISO 10545-4	>1300N / >35N/mm ² (porcelain) >1000N (monocottura)	2741N/ 56N/mm ²
	ASTM-C648	≥ 250 lbs	
Deep Abrasion Resistance	ISO 10545-6	≤ 175 mm ³	131mm ³
	ASTM C-1243		
Chemical Resistance	ISO 10545-13	≥ UB	
		GA / GLA	ULA/UHA
Stain Resistance	ISO 10545-14	> Class 3	5
Frost Resistance	ISO 10545-12	n/a	
	ASTM C-1026		
PEI Rating	ISO 10545-7	n/a	N/A
	ASTM C-1027		
Scratch Hardness	MOHs	n/a	N/A
Variation Rating	n/a	n/a	V-3

Technical Data in provided by the manufacturer and is subject to change at any time. Olympia does not provide warranties as to the specifications of any product.

Color Variation:

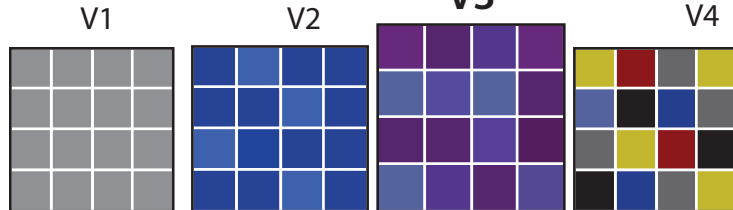

Member:



Recommended Uses:



LARIX - COLOR BODY PORCELAIN
RECTIFIED



SUN (DARK BEIGE)



SHADE (GREY)

LARIX - COLOR BODY PORCELAIN
RECTIFIED



NATURAL (BEIGE)



FRESH (LIGHT GOLD)