


alphatile & stone #

FAIR



THICKNESS - 10mm

24x24 RECTIFIED PAN 24X24 MEFA REC

NON-RECTIFIED PAN 24X24 MEFA



THICKNESS - 9mm


12x24 PAN 12X24 MEFA



THICKNESS - 9mm 3X3 MOSAIC PAN 3X3 MEFA

All items shown in this document are a part of Alpha's stocking program. For special orders please contact your Alpha Tile Sales Representative

STAINED



THICKNESS - 10mm

24x24 **RECTIFIED** PAN 24X24 MEST REC

NON-RECTIFIED PAN 24X24 MEST



THICKNESS - 9mm


12x24 PAN 12X24 MEST



THICKNESS - 9mm **3X3 MOSAIC** PAN 3X3 MEST

All items shown in this document are a part of Alpha's stocking program. For special orders please contact your Alpha Tile Sales Representative

SOLID



THICKNESS - 10mm

24x24 **RECTIFIED** PAN 24X24 MESO REC

NON-RECTIFIED PAN 24X24 MESO



THICKNESS - 9mm

12x24 PAN 12X24 MESO



THICKNESS - 9mm **3X3 MOSAIC** PAN 3X3 MESO

All items shown in this document are a part of Alpha's stocking program. For special orders please contact your Alpha Tile Sales Representative

INFUSED



THICKNESS - 10mm

24x24 RECTIFIED PAN 24X24 MEIN REC

NON-RECTIFIED PAN 24X24 MEIN



THICKNESS - 9mm

12x24 PAN 12X24 MEIN



THICKNESS - 9mm 3X3 MOSAIC PAN 3X3 MEIN

All items shown in this document are a part of Alpha's stocking program. For special orders please contact your Alpha Tile Sales Representative

STRIPES



LIGHT STRIPES THICKNESS - 9mm

12x24 DECOR PAN 12X24 MELS



DARK STRIPES THICKNESS - 9mm

12x24 DECOR PAN 12X24 MEDS

All items shown in this document are a part of Alpha's stocking program. For special orders please contact your Alpha Tile Sales Representative

Technical Tests -- Results Conform to:


	Water absorption	ASTM C373	≤ 0.5%	Conforms
<u>,</u>	Breaking strengh	ASTM C648	≥ 250 lbf	350 lbf 9 mm 425 lbf 10 mm
≣	Linear thermal expansion	ASTM C372	NO PROVISION	α ≤ 8 x 10-6 °C-1 α ≤ 4.4 x 10-6 °F-1
ķ	Stain resistance	ASTM C1378	As indicated by manufacturer	A RESISTANT
4	Chemical resistance	ASTM C650	As indicated by manufacturer	A RESISTANT (No Hydrofluoric acid and its derivatives)
***	Frost resistance	ASTM C1026	As indicated by manufacturer	RESISTANT
4	Shade variation	ANSI A137.1	As indicated by manufacturer	V2 slight variation
P	Resistance to surface abrasion	ASTM C1027	AS INDICATED BY MANUFACTURER	5: FAIR - STAINED - SOLID 4: INFUSED
	Slip resistance	ANSI A326.3	DCOF ≥ 0.42	≥ 0.42

^{*} DO NOT USE HYDROFLOURIC ACID AND ITS DIRIVATIVES

Packing Information

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PALLET
12x24	8	15.82	66.58	32
24x24 RECTIFIED	4	15.61	71.65	32
24x24 NON RECTIFIED	4	15.82	71.65	32
3x3 MOSAIC	4 SHEET	3.84	16.53	80
3x12 BULLNOSE	20		19.84	

Color Variation:

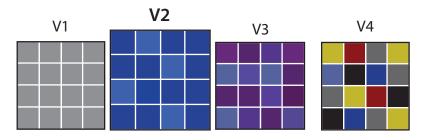

Member:









Recommended Uses:























INFUSED



SOLID, DARK STRIPES



FAIR, LIGHT STRIPES



STAINED