

WHITE



8x48 IM.NV.WHT.0848.MT

BEIGE




8x48 IM.NV.BGE.0848.MT

GREY



8x48 IM.NV.GRY.0848.MT

NERO



8x48 IM.NV.NRO.0848.MT

Not all items shown in this document are a part of Alpha's stocking program, and are pulled from Olympia Tile. For special orders please contact your Alpha Tile Sales Representative

Packing Information


TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PALLET
8x48	6	15.50	75.50	32

Test Performed -- Results Conform

TEST PERFORMED	TEST METHOD	STANDARD	RESULTS
Water Absorption	ISO 10545-3	≤0.5% (porcelain) ≤3.0% (monocottura)	< 0.10%
DCOF	ANSI A137.1/2012	≥0.42	< 0.42
Clin Decistores	DIN 51130/51097	R9	R10
Slip Resistance	BCR	≤.40 to ≤.74	
Bending /	ISO 10545-4	>1300N / >35N/mm² (porcelain) >1000N (monocottura)	s > 1300 N
Breaking Strength	ASTM-C648	≥ 250 lbs	
Deep Abrasion	ISO 10545-6	< 175 mm ³	140 mm
Resistance	ASTM C-1243	≤ 1/5 mm	
Chemical	ISO 10545-13	≥ UB	GA
Resistance		GA / GLA	
Stain Resistance	ISO 10545-14	> Class 3	5
Frost Resistance	ISO 10545-12	n/a	Yes
Frost Resistance	ASTM C-1026	11/a	
PEI Rating	ISO 10545-7	n/a	N/A
	ASTM C-1027	1.5.5	
Scratch Hardness	MOHs	n/a	N/A
Variation Rating	n/a	n/a	V-2

Technical Data in provided by the manufacturer and is subject to change at any time. Olympia does not provide warranties as to the specifications of any product.

Color Variation:

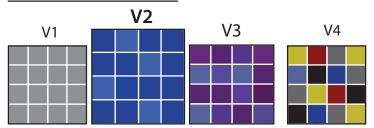

Member:



Council







Member of U.Seramic Tile Green Buildingstributors of Council America (CTDA)

AIA

Marble Institute of America

Recommended Uses:























GREY



NERO