





Not all items shown in this document are a part of Alpha's stocking program and are pulled from Olympia Tile. For special orders please contact your Alpha Tile Sales Representative


Packing Information

TILE SIZE	PC/BOX	SF/BOX	LB/BOX	BOX/PALLET
6x24	14	13.56	57	50

Test Performed -- Results Conform

	Length and width		
ISO 10545-2	Thickness		
	Rectangularity		
	Straightness of Sides		
	Surface Flatness		
ISO 10545-3	Water Absorption		
ISO 10545-4	Breaking strength,in N		
	Modulus of Rupture (N/mm²)		
ISO 10545-5	Impact resistance		
ISO 10545-7	Resistance to Surface Abrasion for Glazed Tile		
ISO 10545-8	Linear Thermal Expansion Coefficient		
ISO 10545-9	Resistance to Thermal Shock		
ISO 10545-11	Crazing Resistance in Glazed Tiles		
ISO 10545-12	Frost Resistance		
	Resistance to chemicals		
	Resistance to low concantrations of acids and alkalis		
ISO 10545-13	Glazed tiles		
	Resistance to high concantrations of acids and alkalis		
	Glazed tiles		
	Resistance to household chemicals and swimming pool salts		
	Glazed tiles		
	Resistance to Staining		
	Glazed tiles		
ISO 10545-14	Stains leaving a trace (pastes): Green staining agent in light oil		
	Stains having chemical / oxidizing action: Lodine, 13 g/l solution in alcohol		
	Stains forming a film: Olive oil		
DIN 51130 DIN 51097	Ramp Slip resistance (Oil / Wet)		

Technical Data in provided by the manufacturer and is subject to change at any time. Olympia does not provide warranties as to the specifications of any product.

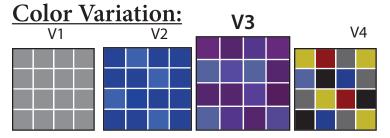

Member:











Recommended Uses:





















CHESTNUT (DARK BROWN)